


Suction cups / PTFE

VG.PAAT fat PTFE suction cups, 16 - 20 - 30 - 40

- Suction cup in PTFE
- Silicone compensator
- Stainless steel fitting
- Suitable for high working temperatures up to 300°C
- PTFE does not stick to polymers or hot fibres
- The elastic suspension allows axial and angular movements



Application example

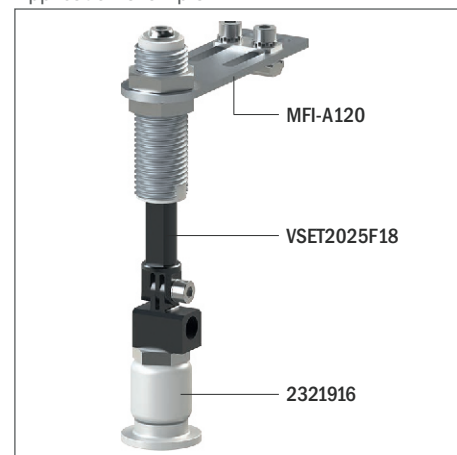

Technical data

Material	Lifting force [N] perpendicular to the surface, at various vacuum levels			Suction cup weight [g]
	-20 kPa	-60 kPa	-90 kPa	
PAAT16R - PTFE	—	6	8	9
PAAT20R - PTFE	—	8.2	13	9
PAAT30R - PTFE	—	9	14	37
PAAT40R - PTFE	—	9.6	15	37

Technical features

Material	Colour	Temperature range
PTFE	White	-20 ÷ +300 °C

Identification codes

Drawing	Alphanumeric code	Suction cups with fitting	Order code
A	VG.PAAT.16R	VG.PAAT.16R PTFE suction cup, M5 male	2321914
B	VG.PAAT.20R	VG.PAAT.20R PTFE suction cup, M5 male	2321915
C	VG.PAAT.30R	VG.PAAT.30R PTFE suction cup, G1/8" male	2321916
D	VG.PAAT.40R	VG.PAAT.40R PTFE suction cup, G1/8" male	2321917

